


SETUP MANUAL

**SM-6
MONITOR SPEAKER**

Quick Guide

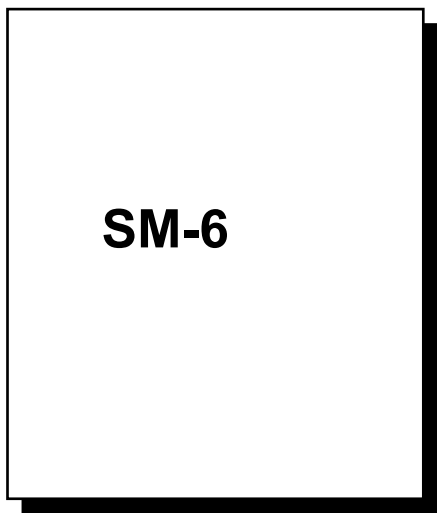

SM-6 Monitor Speaker

INTRODUCTION:

Thank you for your choice in purchasing our loudspeakers. The SM-6 is one of our compact monitor speaker designed by MODVO, a manufacturer that specialize in building compact loudspeakers.


The SM-6 speaker adds quality and sound at a affordable price. This compact monitor speaker adds clean and detailed sound that is not heard of in a speaker this size and price.

PREPARING THE SPEAKERS:

Please read this entire manual before making any connections. Follow the steps below.


1. Before you hook-up your speakers, make sure your receiver/amplifier is powered off. Once your amplifier is off, you can begin hooking up you speakers to the amp.

There are two terminals on the rear of each satellite speaker, one red positive (+) and the other black negative (-). The positive terminal of you speaker should be connected to the positive lead of your amplifier / receiver and the negative terminal to the negative lead (as shown below). If you are going to use these speakers as main (front speakers) speakers on a 5.1 or 7.1 receiver, make sure they are connect to the front speaker leads (FT or Front L/R) as labeled on your receiver.

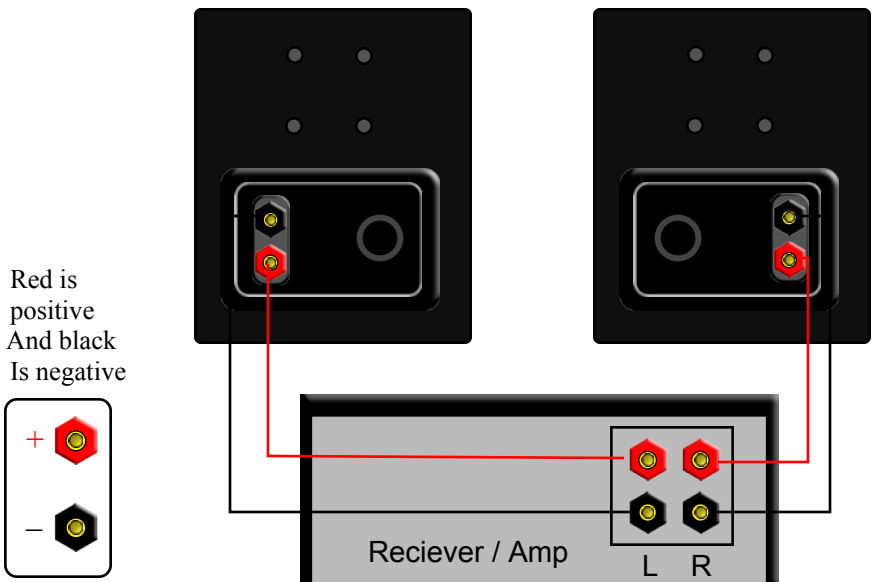

SETUP

Since The SM-6 speaker is a rear vented/ported speaker, it should be placed 2 -3 feet from the wall to insure proper airflow from the rear firing ports. Depending on the size of your room, it is recommend to try different speaker placements until you achieve the desired sound. How far you place your speakers from the wall, will determine the bass response of them.

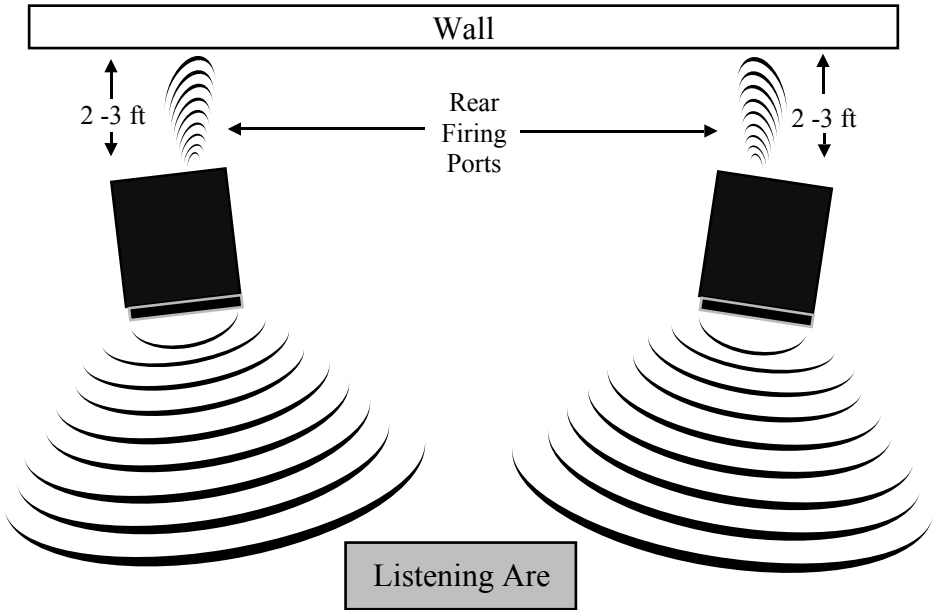

SPEAKER MAINTENANCE

For the life of your speakers, we recommend using reasonable power and volume level. These speakers are designed to be used with amplifiers with a maximum power of 100 watts per channel. To prevent burn-out or damage to the drivers, avoid setting bass level on max, half way is more reasonable for a speaker this size. This will prevent the speakers from clipping and bottoming out at high level of sound.

CABINET MAINTENANCE

The speaker cabinets should be treated the same way as a piece of furniture. Each speaker cabinet is finished in a gloss paint, which does not require any special cleaning. A simple lint-free cloth will work fine for cleaning. Do not use any liquid chemicals to clean, by doing so, this can streak the finish. No sharp object should be place on or near the speakers, by doing so, will scratch the finish.

SYSTEM SPECIFICATION:

Monitor Speaker (each)

Cabinet Type: Vented

Drivers:

3/4" silk dome tweeter

6 1/2" Cast frame woofer with large rubber surround

Terminal Plate:

Binding post terminals

Ohms: 8

Power handling: 15 - 80 watts max

Frequency Response: 60 - 20,000Hz

Sensitivity: 88 dB (/2.83V/m)

Dimensions: 8-3/8" W x 11-1/4" H x 11"D

<p>If you have any problem on setting up your speakers, please feel free to Contact us. We'll do our best to have your speakers up and running.</p>	<p>Contact Us Online Site: www.modvo.com Email: support@modvo.com Fb: facebook.com/modvo</p>
---	--

WWW.MODVO.COM